
FXCEL 6/10(12) kV 3x16/10

Product information

Standards

IEC 60502-2

HD 620 S2:2010 Part 10 Section M

Conductor

Copper, hard drawn, circular, stranded

Nominal cross sectional area: 16 mm²

Diameter, nominal: 4.7 mm

Inner conductive layer

Extruded PE

Insulation

XLPE, Triple extruded, dry cured vulcanized

Nominal thickness: 3.4 mm

Diameter over insulation approx. 12.2 mm

Outer conductive layer

Extruded PE, easy strippable

Screen

Band of woven copper threads

Nominal cross sectional area, 10mm²

Tape

Cu-PET tape

Sheath

Black LLD PE Nominal thickness: 2.2 mm

Outer diameter: 31 mm

Outer circumscribed circle diameter: 33 mm

Weight: 1.0 kg/m

Density: 1.45 kg/dm

Embossed


nkt cables

FXCEL 6/10(12) kV 3x16/10 (Year of manufacturing YYYY)" +

meter marked

Application

Self suspending 3-core cable, for use as aerial

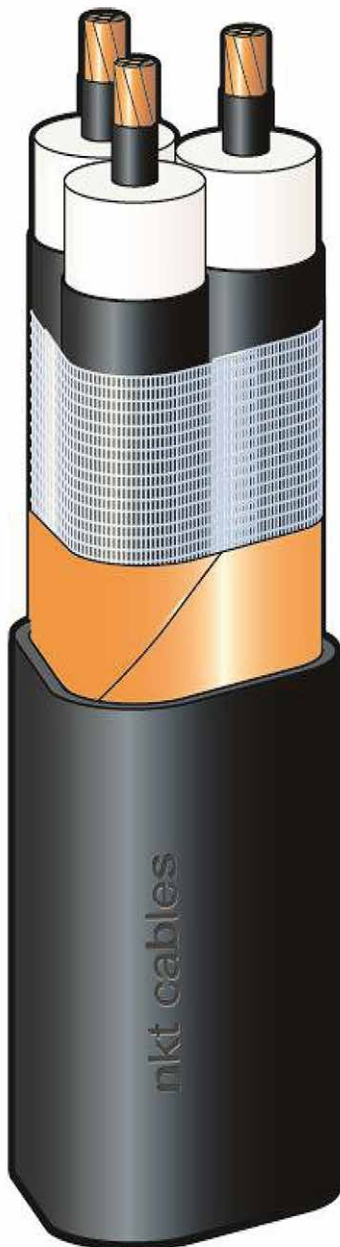

Technical data FXCEL 6/10(12) kV 3x16/10

Electrical characteristics

number of conductors x cross sections area (mm ²)	3 x 16/10		
rated voltage (U _o /U/U _m)	6/10(12) kV		
Rated current according to IEC287		in air 25°C	in the ground 15°C
maximum conductor temperature	65°C	85 A	94 A
	90°C	105 A	105 A
as self supporting suspending cable	65°C	85 A	
Conductor resistance max. at 20 °C	1,15 Ω/km		
Inductance	0,40 mH/km		
Capacitance	0,16 µF/km		
Earth fault current	0,90 A/km		
Max. short circuit current (1 sec.) at 250 °C end conductor temp.	3,0 kA		
Max. short circuit current, for the screen	2,0 kA		

Installation

Minimum bending radius	
at laying	400 mm
at fixed position	250 mm
Min. temp. at laying approx.	-20°C

Data for calculation in pole-setting systems

Area	55 mm ²
Diameter	31 mm
Qc, Cable weight	1,0 kg/m
E _{ik} , Elasticity-modulus initial, before ice load	80.000 N/mm ²
E _p , Elasticity-modulus after permanent creeping	100.000 N/mm ²
T _p , Permanent elongation or creeping	0,4 %
Coefficient of linear expansion per °C	18 x 10 ⁻⁶
Definitude strain 0 °C	80 N/mm ²
Maximum force on cable in calculations	11 kN
Approximate fast break load for cable	> 25 kN
Approximate long term break load for cable	> 17 kN



The products were part of Ericsson Energy Cables & Interconnect, which sold NKT cables.

read more ->

